Your professional mounting solution -

used by international galleries, sign makers, industrial manufacturers and many more...

For decades, Neschen's gudy® mounting films have been a high-quality solution for a variety of customer demands. From high-end mounting of photos and prints, to point of sale advertising or industrial applications – gudy® mounting films create outstanding results.

The gudy® portfolio is made for cold lamination, guaranteeing best results after laminating with a laminating machine or by hand.



A professional mounting and framing solution for photographs, fine art prints, Baryta papers, photo albums or passe-partouts. From face mountings of inkjet papers behind acrylic glass or the high- end adhesion of fine art papers to board materials, the gudy® range is the best choice for our customers' demands.



Discover permanent or non-permanent adhesives for a variety of short-term or long-term applications, such as **installing promotional posters on shop windows**, **advertising on exhibition booths or creating selfadhesive boards**. Gudy® sets no boundaries to your creativity.




Dimensionally stable, flexible and ageing-resistant – the gudy® portfolio is a reliable, high-quality choice for many applications. The waterbased adhesive formulations, with low or high adhesive strength, is environmentally friendly and **ideal for industrial applications** like die manufacturing, the automotive industry and many much more...

NESCHEN COATING GMBH

Hans-Neschen-Str. 1 31675 Bückeburg, Germany

- **T** +49 (0)5722 207 0
- **F** +49 (0)5722 207 197
- **E** info@neschen.de

www.neschen.com

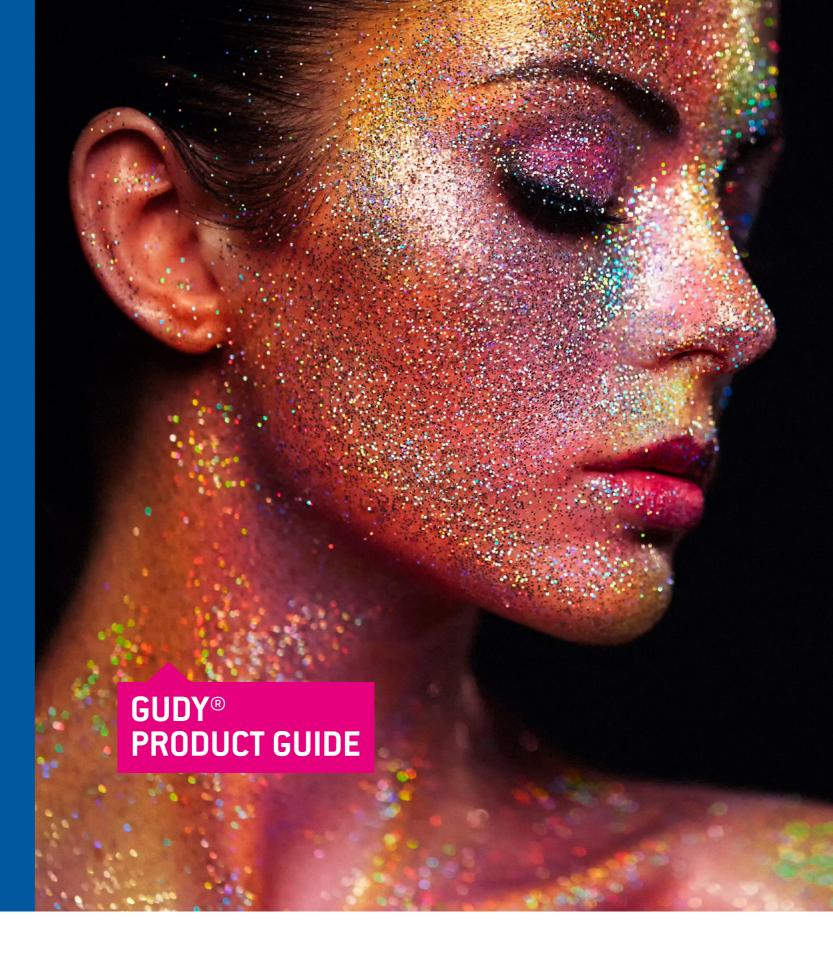





GUDY® PRODUCT GUIDE

	permanent adhesive											
	802	802 twin	8020	8020 twin	803 power tack	808 PP opaque	PP clear	ultra clear	831 Fine Art smooth	832 Fine Art textured	870	806 Hybrid
Max. width	160 cm	160 cm	200 cm	200 cm	160 cm	160 cm	160 cm	152,4 cm	160 cm	160 cm	124 cm	130 cm
Carrier type	PET	PET	PET	PET	PET	white PET	OPP	PET	Paper	Paper	Carrier less	PVC
Thickness	23 μm	23 μm	12 μm	12 μm	23 μm	75 μm	25 μm	12 µm	44 μm	44 µm	Carrier less	70 μm
Release liner	single-sided	double-sided	single-sided	double-sided	single-sided	single-sided	single-sided	double-sided	single-sided	single-sided	single-sided	single-sided
Primary Bond	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent
Secondary Bond	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	permanent	semi-permaner
Adhesion power	medium	medium	medium	medium	very high	medium	medium	medium	high	high	medium	P - high / R- lo
Recommended Laminator speed	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	0,5 mpm	0,5-1 mpm	0,5-1 mpm	0,5 mpm	1-1,5 mpm
ndoor suitablity	<i>/</i>	✓ ·	✓ /	✓ /	✓ /	√ ·	√ ·	<i>✓</i>		<i>✓</i>	<i>√</i>	✓ /
Outdoor suitability	/	✓	√	1	√ ·	✓	/	✓	·	<u> </u>	1	<u> </u>
Certificates	Photograpic Activity Test (PAT) ISO 18916	·		·	·	·	Photograpic Activity Test (PAT) ISO 18916	·	Photograpic Activity Test (PAT) ISO 18916	Photograpic Activity Test (PAT) ISO 18916	Photograpic Activity Test (PAT) ISO 18916	
ecommended board applications												
n acrylic plates	√	./	./	✓		<i></i>	./	√			./	./
ehind acrylic plates (tempered)	v	v	V	v		v	v	✓			v	v
ilass	<i>J</i>	√	/	/		<i></i>	./	✓			./	✓
VC hardfoam boards (e.g. Forex)	√	✓	✓ ✓	V /	,	✓ ✓	V	v	/	/	V	· · · · · · · · · · · · · · · · · · ·
PL boards	✓ ✓	✓	✓ ✓	<i>y</i>	,/	✓ ✓			V	V		V
olystrol boards (e.g. Smart-X)	✓ ✓	✓	✓ ✓	✓ ✓	,/	✓ ✓	/			./	/	/
apa boards	✓ ✓	*			, ,	✓ ✓	V		<i>y</i>	<i>y</i>	V	
ibond boards	-	<u>√</u>	√	√ √	V	V	V		<i>y</i>	<i>y</i>	√	√
	✓	✓	V	√	V	V	V	√	· · ·	•	√	√
ark foamboards						✓ ·			✓ ·	√		
adur boards (PVC-free)	√	✓	√	√	√	√	√		√	/	√	
DF boards					√					✓		
SB boards					√							
eneer plates					✓					✓	√	
creen printing plates	✓	✓	✓	√	✓	✓						
lywood boards					✓					✓		
oneycomb paperboard	✓	✓	✓	√	✓				√	✓	√	✓
uitable print media												
E or Barytt photo papers	✓	✓	√	√		✓	✓	✓			✓	
rigital prints	✓	✓	✓	√	✓	✓	√					✓
00% rag und Alpha cellulose Paper									√	√	✓	
ine Art Papers Smooth up to 300 g/m²									√		√	
ne Art Papers textured up to 350 g/m2									·	√		
ine Art Papers >350 g/m²										· ✓		
ow-cost graphic papers up to 170 g/m ²										•		✓
					√							
					./							./
Textiles Banner materials												
Suitable Neschen laminating machines		,	T	T			<u> </u>		,		<u> </u>	
eschen Photolam 650	√ ·	√							✓ ·	√		
eschen Ecolam 1650	√	✓			✓	✓	✓		√	✓	√	✓
eschen Coldlam 1650	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
Neschen Hotlam 1650 TH	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
Neschen Hotlam 1650 Double H	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓

804	Dot		
130 cm	160 cm		
PVC	Carrier less		
70 μm	Carrier less		
double-sided	single-sided		
permanent	semi-permanent		
removable	semi-permanent		
P - hoch / R - low	low		
0,5 - 1 mpm	0,5 mpm		
✓	✓		
	Photograpic Activity Test (PAT) ISO 18916		
	130 cm PVC 70 µm double-sided permanent removable P - hoch / R - low 0,5 - 1 mpm		

		✓
✓	✓	
✓	✓	✓
		✓

✓	✓	
		✓

✓	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	✓